

Anti-shearing arms



Release with a customised key


OPERATOR WITH ARTICULATED ARM FOR SWING GATES

- Available version: 24V
- It moves leaves up to 2.5m
- Standard equipped with ENV function (Virtual Encoder) - PATENT
- G-WAY system (with Brain 06 Control Board)
- Release through a user friendly accessory lever and customised key
- Optional outdoor cord release
- Sturdy inner kinematic mechanism made of a bronze crown and steel worm-screw
- Opening and closing slow down available in both versions
- Up to 30 consecutive cycles, 100 daily cycles

Code	Name	Version	Voltage	Leaf max. length	Use
6170135	Compas 24	Non-reversible	24V	2.5 m.	Residential
6170136	Compas 24 C	Non-reversible with control board Brain 06	24V	2.5 m.	Residential

N.B. For safeties use only obstacle detection devices in BUS (G-WAY) version.

OPERATOR DIMENSIONS

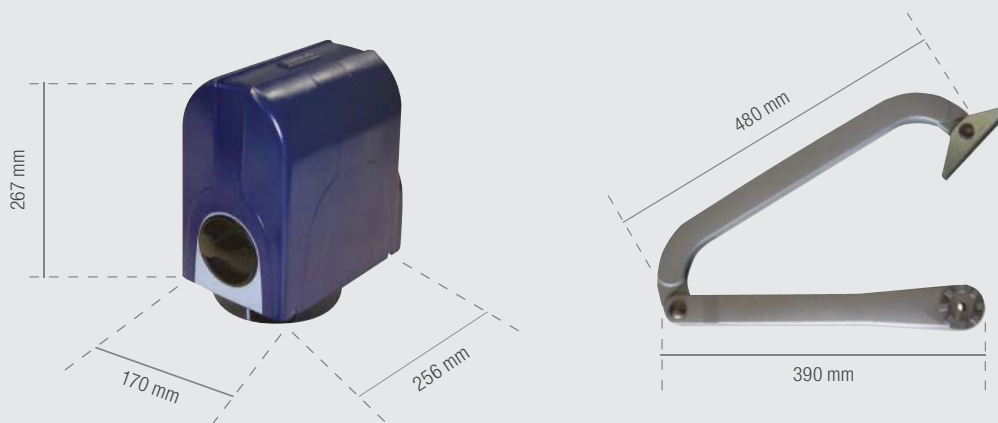

Technical Specifications	Compas 24	Compas 24 C
Power supply (V)	24	
Nominal power (W)	120	140
Max. torque (Nm)	250	
Angular speed (°/sec)	13	
Max. Leaf Weight (Kg) ¹	310	
Max. continuous cycles	30	
Frequency of use at 20 °C	continuous	
Operating ambient temperature (°C)	-20 +55	
Protection class	IP44	
Weight (kg)	7	8.7

1 - The max. weight of the leaf depends on length: max 200 Kg for 2.50 m; max. 310 Kg for 1.00 m.

N.B Over 2.00 m an electric lock is essential to ensure leaf blocking.